



EN



ARJES

Recycling Innovation



TITAN
THE HEAVY-DUTY CLASS





www.arjes.de

OUR SHREDDERS OF THE ARJES HEAVY-DUTY CLASS



When choosing the right machine, our customers are usually faced with the question of which shredder is right for their specific requirements. Therefore, we have divided our unique double-shaft shredders into three product lines to help you make the right decision.

Fields of application TITAN class

-  Waste Wood & Biomass
-  Household & Commercial Waste
-  Construction & Demolition Waste
-  Scrap Metal & Car Bodies

CONCRETE SHAFTS



METAL SHAFTS



PADDLE SHAFTS



Find out more about our applications and tool shafts in the brochure
RECYCLING IS OUR GLOBAL SOLUTION




PRODUCT LINE **TITAN**

The TITAN class is all about the heaviest chunks and the most demanding applications. Where many throw in the towel, we take on the challenge and seek to satisfy with a competitively superior range of applications. Especially companies that have to process a huge amount of waste products on a daily basis find themselves at home within this price range. Our mobile shredders are available in two versions and include, as standard series, a track system. The TITAN shredders are equipped with a revolutionary quick change shaft system, an innovative SCU control as well as specifically designed shafts that meet the most challenging requirements.

Alternatively, the ARJES heavy-duty class also offers the possibility of using a stationary electric or diesel version, in which the twin-shaft shredders convince with maximum efficiency. The system is divided into a drive and control unit and can be integrated into existing recycling plants or used as a stand-alone machine.

Numerous applications for our machines can be found in the construction and demolition industry, in the shredding of mixed scrap, car bodies, car, truck, AG & EM tyres, in the processing of domestic and commercial waste, as well as, in composting and wood processing plants.

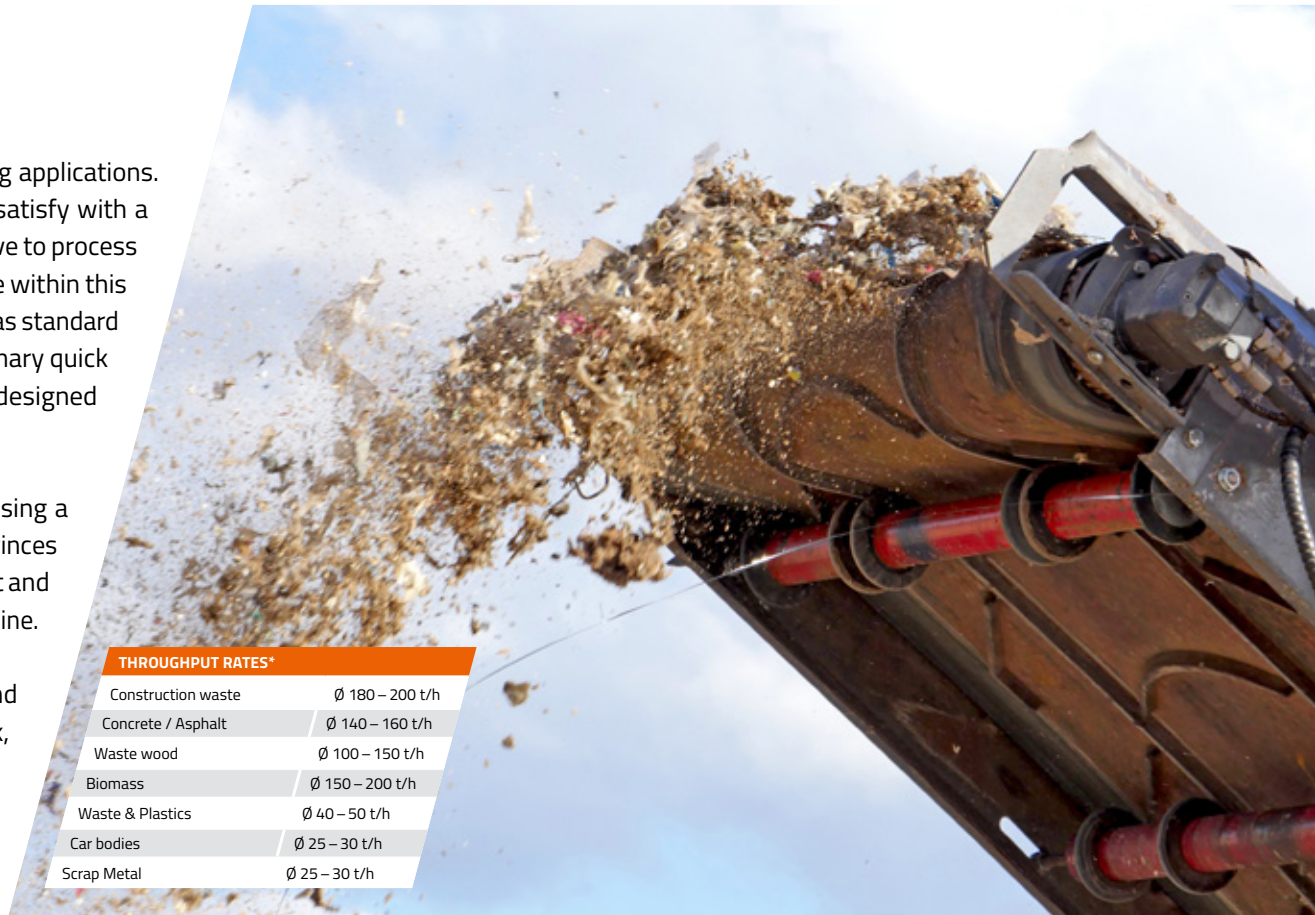

THROUGHPUT RATES*

Construction waste	Ø 180 – 200 t/h
Concrete / Asphalt	Ø 140 – 160 t/h
Waste wood	Ø 100 – 150 t/h
Biomass	Ø 150 – 200 t/h
Waste & Plastics	Ø 40 – 50 t/h
Car bodies	Ø 25 – 30 t/h
Scrap Metal	Ø 25 – 30 t/h

*Depends on the equipment of the shredder, the shaft configuration and the optimum material feed. The performance data given are average values without guarantee!

TITAN 900

The highlights of the mobile heavy-duty class in detail



REVERSING FAN

Included! Self cleaning CLEANFIX fan for ideal air circulation and dirt reduction in the engine compartment



SHREDDING UNIT

Large-volume hopper and double shaft system with **quick-change cassette**




SCU-CONTROL SYSTEM

Including **remote control** and predefined shredding programs that adjust rotation and speed of shafts



TRACK SYSTEM

Included! Guaranteed high mobility on uneven surfaces

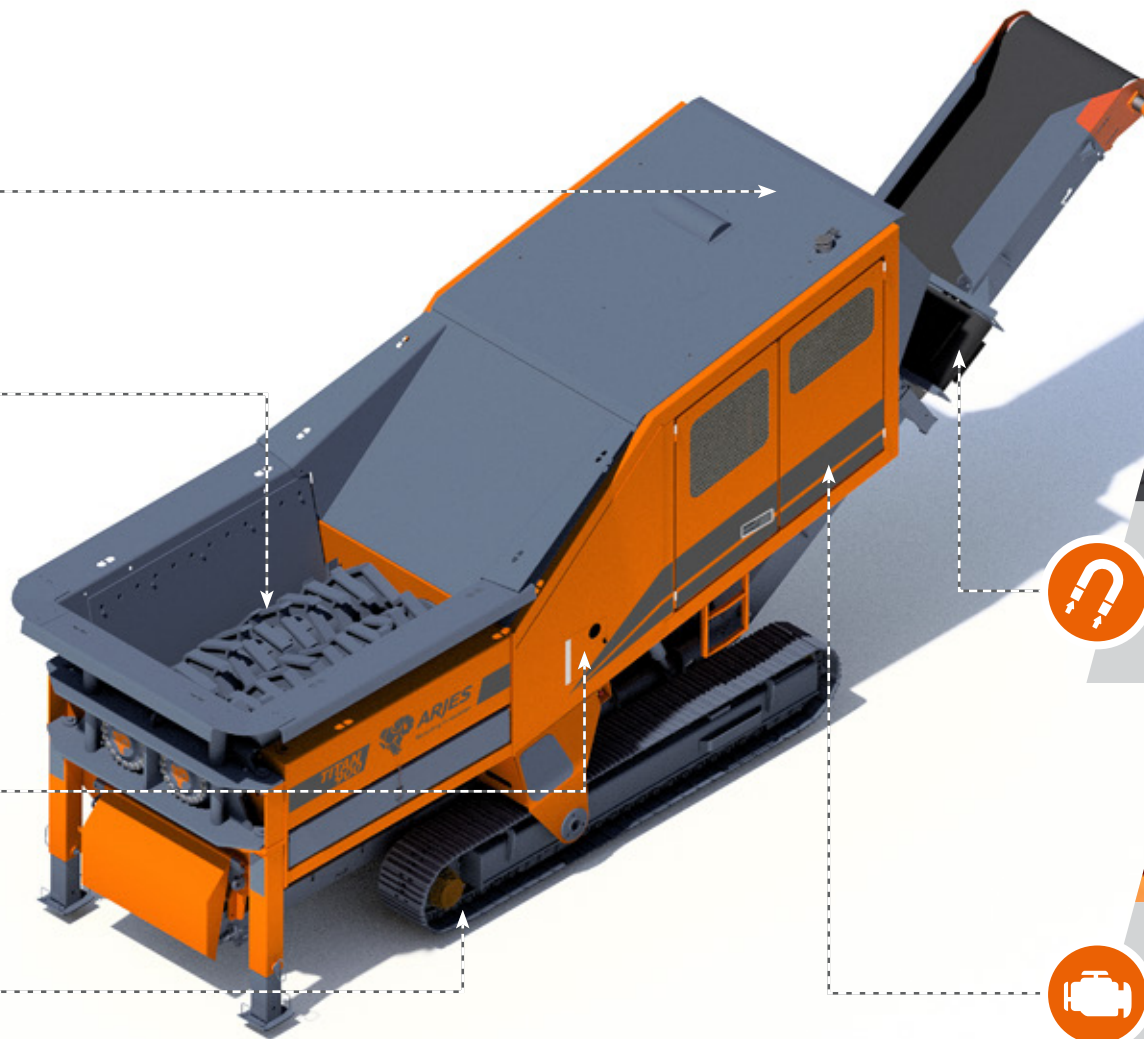

MAGNET

Included! Height-adjustable permanent magnet for effective Fe-separation



DRIVE

Powerful **VOLVO PENTA** diesel engine for the maximum efficiency during the shredding process



POWERED BY
VOLVO PENTA

TECHNICAL DATA

DIMENSIONS

Version	Track system
Length (mm)	11.000 / 11.000 (Transport)
Width (mm)	3.000 / 3.000 (Transport)
Height (mm)	4.200 / 3.700 (Transport)
Total weight (kg)	35.000

DRIVE	EU	US	ROW*
Engine (Volvo Penta)	TAD 1385 VE	TAD 1672 VE	TAD 1650VE-B
Emission standard	EU Stage V	EPA Tier 4f	Stage IIIA
Power (kW / HP)	405 / 550	515 / 700	405 / 550
Fuel capacity (l)	800		
Gearbox	Bonfiglioli		

DISCHARGE BELT

Discharge height (mm)	max. 4.000
Width (mm)	1.200
Included	Height adjustable over-belt magnet

SHREDDING UNIT

Hopper volume (m ³)	5
Shaft length (mm)	2.500
Shaft diameter (mm)	860
Weight (kg / cassette)	6.700
Rotation speed (rpm)	15 – 45




Scan QR-Code and watch the TITAN 900 in action!




Easy maneuvering and transportability

The standardised track system provides optimal mobility at the operational site and makes transportation on a low-bed truck even more affordable and efficient.

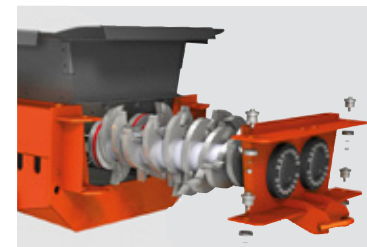

Quick change system for shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases productivity.

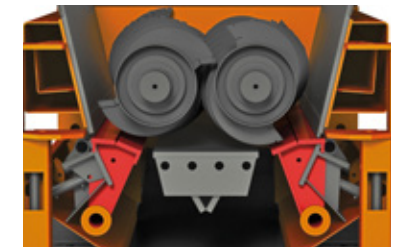

Hydraulic adjustable side combs

The side combs can be opened or closed to regulate the final grain size. This allows the throughput to be defined depending on the material and the customer's requirements.

*Rest of the world (country-specific requirements)

TITAN 900 e-pu/d-pu

The highlights of the stationary heavy-duty class in detail

SHREDDING UNIT

Large-volume hopper and double shaft system with **quick-change cassette**



MAGNET

Optional!
Height-adjustable permanent magnet for effective Fe-separation



STATIONARY

Use as stand-alone machine or optional integration into recycling plants according to customer requirements



DISCHARGE BELT

Optional!
Conveyor belt for efficient material discharge according to customer requirements



CONTROL SYSTEM

Operation via **remote control** and optional integration into complete systems possible according to customer requirements



DRIVE (e-pu / d-pu)

Two powerful **electric engines** or one **diesel engine** for off-grid operations



TECHNICAL DATA

DIMENSIONS

Version Stationary

Shredding Unit

Length (mm) 4.700

Width (mm) 3.000

Height (mm) 3.100

Control Unit

Length (mm) 3.500

Width (mm) 2.300

Height (mm) 2.300

Total weight (kg) approx. 22.000

DRIVE

Engine Electric Diesel (13 l Stage V)

Power (kW) 2 x 160 405

Gearbox Bonfiglioli

SHREDDING UNIT

Hopper volume (m³) 5

Shaft length (mm) 2.500

Shaft diameter (mm) 860

Weight (kg / cassette) 6.700

Rotation speed (rpm) 15 – 45




Scan QR-Code and watch the TITAN 900 e-pu in action!




Separate drive and control unit

Due to separate placement of the shredding and control unit (max 8 meters in between) there is significant less vibration to the control system. Additionally, dust and dirt are reduced

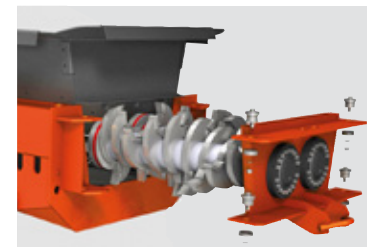

Quick change system for shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases more productivity.

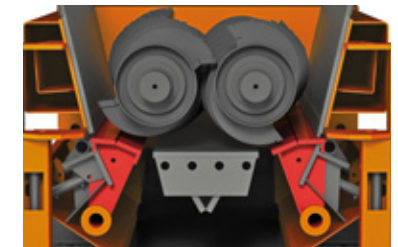

Hydraulic adjustable side combs

The side combs can be opened or closed to regulate the final grain size. This allows the throughput to be defined depending on the material and the customer's requirements.

TITAN 950

The highlights of the mobile heavy-duty class in detail



REVERSING FAN

Included! Self cleaning CLEANFIX fan for ideal air circulation and dirt reduction in the engine compartment



SHREDDING UNIT

Large-volume hopper and double shaft system with **quick-change cassette**



SCU-CONTROL SYSTEM

Including **remote control** and predefined shredding programs that adjust rotation and speed of shafts



TRACK SYSTEM

Included! Guaranteed high mobility on uneven surfaces



MAGNET

Included! Lengthwise, built-in rigid permanent magnet for effective Fe separation



CROSS BELT

Included! For lateral discharge of the separated non-ferrous fraction



POWERED BY
VOLVO PENTA



DRIVE

Powerful **VOLVO PENTA** diesel engine for the maximum efficiency during the shredding process.

TECHNICAL DATA

DIMENSIONS

Version	Track system
Length (mm)	13.000 / 13.000 (Transport)
Width (mm)	5.700 / 3.000 (Transport)
Height (mm)	4.500 / 3.700 (Transport)
Total weight (kg)	37.000

DRIVE	EU	US	ROW*
Engine (Volvo Penta)	TAD 1385 VE	TAD 1672 VE	TAD 1650VE-B
Emission standard	EU Stage V	EPA Tier 4f	Stage IIIA
Power (kW / HP)	405 / 550	515 / 700	405 / 550
Fuel capacity (l)	800		
Gearbox	Bonfiglioli		

DISCHARGE BELT

Discharge height (mm)	max. 3.600
Width (mm)	1.000 (Ne-Fraction) 1.400 (Fe-Fraction)
Included	Cross belt and lengthwise magnet

SHREDDING UNIT

Hopper volume (m ³)	5
Shaft length (mm)	2.500
Shaft diameter (mm)	860
Weight (kg / cassette)	6.700
Rotation speed (rpm)	15 – 45




Scan QR-Code and watch the TITAN 900 in action!



Easy maneuvering and transportability

The standardised track system provides optimal mobility at the operational site and makes transportation on a low-bed truck even more affordable and efficient.

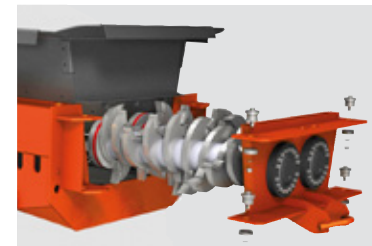

Quick change system for shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases more productivity.



Automatic pressure controlled damping system

If the resistance is too high, the side combs marked in red retract inwards and outwards hydrologically. This prevents damage to the shredding unit and regulates the size of the shredded material.

*Rest of the world (country-specific requirements)

TITAN 950 e-pu/d-pu

The highlights of the stationary heavy-duty class in detail

SHREDDING UNIT

Specially reinforced volume hopper and double shaft system with quick-change cassette (optional hopper elevation)



MAGNET

Optional! Height-adjustable permanent magnet for effective Fe-separation



STATIONARY

Used as an individual machine or optional integration in recycling plants according to customer requirements



DISCHARGE BELT

Optional! Conveyor belt for efficient material discharge according to customer requirements



CONTROL SYSTEM

Operation via remote control and optional integration into complete systems possible according to customer requirements



DRIVE (e-pu / d-pu)

Two powerful electric engines or one diesel engine for off-grid operations



TECHNICAL DATA

DIMENSIONS

Version Stationary

Shredding Unit

Length (mm) 4.500

Width (mm) 3.200

Height (mm) 4.700

Control Unit

Length (mm) 3.500

Width (mm) 2.300

Height (mm) 2.300

Total weight (kg) approx. 26.000

DRIVE

Engine Electric Diesel (13 l Stage V)

Power (kW) 2 x 250 405

Gearbox Bonfiglioli

SHREDDING UNIT

Hopper volume (m³) 5

Shaft length (mm) 2.500

Shaft diameter (mm) 860

Weight (kg / cassette) 6.700

Rotation speed (rpm) 15 – 45




Scan QR-Code and watch the TITAN 900 e-pu in action!



Separate drive and control unit

Due to separate placement of the shredding and control unit (max 8 meters in between) there is significant less vibration to the control system. Additionally, dust and dirt are reduced

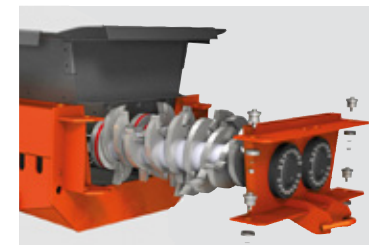

Quick change system for shafts

Easy installation and quick removal of shafts, for easier maintenance, refurbishment and changing of shaft type, which increases more productivity.



Hydraulically damped side combs

For particularly large and heavy metal parts, the suspension of the hydraulically side combs is located above the shafts, these are automatically folded out in the event of excessive resistance.



ARJES GmbH
Werkspatz 1 | D-36433 Leimbach

+49 (3695) 85 855-0

+49 (3695) 85 855-14

info@arjes.de

www.arjes.de

Your local dealer



5 CONVINCING ARGUMENTS FOR OUR HEAVY-DUTY CLASS

- 1 Best price-performance ratio in its class**
Including standard attachments* (e.g. overbelt magnet)
- 2 Largest range of applications**
Processing of many types of material with the toughest requirements (such as cars, household and industrial waste, AG/EM-tyres, railway sleepers etc.)
- 3 Revolutionary shaft quick-change system**
Shortens maintenance times, refurbishment and changing of the different shaft types for uninterrupted operation
- 4 Maximum mobility in every situation**
Standerized track system* and cost-effective transportation
- 5 Innovative SCU plug-and-play control**
Predefined shredding programs that control rotation and speed of shafts for user-friendly operability

*only available for mobile machines