

UFKES
Greentec



Greentec
■ PANTHERA

FORESTLINE



■ Greentec PANTHERA



3-axle trailer or semi-trailer




Tracks



truck mounted
4 - 5 axes



Container chassis (hooklift)

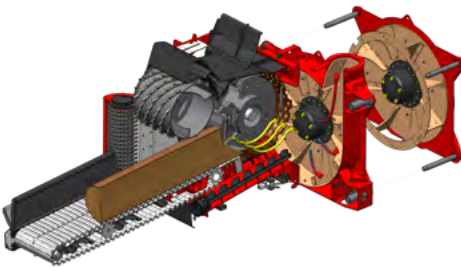

Ufkes direct flow system, chips are directly blown in the heart of the suction blower.

John Deere 18 ltr 908 HP. Unique because it requires no after-treatment (no AdBlue, DPF, SCR or DOC) while still meeting the strictest emission regulation, Tier 4Final/Stage 5.

- Ufkes direct flow system, chips are directly blown in the heart of the suction blower
- At this position the blowing blades have the lowest speed. The uniform quality woodchip won't be smashed. The chips are directed to the outside of the blower by the centrifugal force where they come out of the chute with high blowing force
- Rest material of the infeedchain and under the drum will be transported to the blower with 3 augers to avoid spillage underneath the machine
- For logs, the hatches next to the feed chain are hydraulically foldable for easy feeding.

Greentec PANTHERA

Infeed opening (mm)	1000 x 2140
Feed opening channel (mm)	900 x 1400
Max. infeed softwood (mm)	Ø 900
Drum (mm)	Ø 1040 x 1400
Standing infeed rollers (mm)	Ø 370 x 830
Chipper knives	6
Anvil knives	1
Max. chip length (mm)	55 (75)

Equipped with large diameter blower 1500mm, speed easy continuously adjustable on joy-stick from 180 to 400 RPM

Open style knivedrum, 400-500 RPM

Knives are multiple sharpening, with shims easy to fill and adjust. Equipped with obstacle prevention, knives can move to the back

Knives are adjustable and can fold away at calamity

Standard equipped with toolboxlift for easy acces for service on the knivedrum

Automatic reversible fan for cleaning the radiator

GCS 6.0 control (Greentec Control System)




900 x 1400 mm



≤ 90 cm



908 HP



20-55 (75) mm

UFKES
Greentec

Kelvinlaan 80
9207 JB DRACHTEN
+31 (0) 512 - 584 760

WWW.UFKES.NET ■